

CR LAURENCE CO., INC. FLORIDA BUILDING CODE TEST REPORT

SCOPE OF WORK

TAS 201, TAS 202, AND TAS 203 TESTING ON D900 SIDE HINGED DOOR (LARGE MISSILE IMPACT)

REPORT NUMBER

H6776.01-303-18 R2

TEST DATE(S)

01/24/18 - 01/26/18

ISSUE DATE REVISION DATE

02/16/18 02/06/19

RECORD RETENTION END DATE

01/26/28

LABORATORY CERTIFICATION NO.

16-0421.01

PAGES

20

DOCUMENT CONTROL NUMBER

ATI 00651 (07/24/17) RT-R-AMER-Test-2816 © 2017 INTERTEK





Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

REPORT ISSUED TO

CR LAURENCE CO., INC. 2503 E. Vernon Avenue Los Angeles, California 90058

SECTION 1

SCOPE

Intertek Building & Construction (B&C) was contracted by CR Laurence Co., Inc. to perform TAS 201, TAS 202, and TAS 203 testing in accordance with Florida Building Code for High Velocity Hurricane Zone requirements on their D900, Side Hinged Door. Results obtained are tested values and were secured by using the designated test methods. Testing was conducted at the Intertek B&C test facility in Lake Forest, California. This report does not constitute certification of this product nor an opinion or endorsement by this laboratory.

SECTION 2

SUMMARY OF TEST RESULTS

The specimen(s) tested met the performance requirements set forth in the protocols.

Product Type: Side Hinged Door

Series/Model: D900 (Large Missile Impact)

SPEC.	TEST PROTOCOL	DESIGN PRESSURE
1	TAS 202	+80 / -80 psf
2	TAS 201/203 (Large Missile)	+80 / -80 psf
3	TAS 201/203 (Large Missile)	+80 / -80 psf
4	TAS 201/203 (Large Missile)	+80 / -80 psf

For INTERTEK B&C:

COMPLETED BY: Jarod S. Hardman REVIEWED BY: Tyler Westerling, P.E.

TITLE: Senior Project Engineer

SIGNATURE: SIGNATURE:
DATE: 02/06/19

DATE: 02/06/19

jsh:ss:ab

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Version: 07/24/17 Page 2 of 20 RT-R-AMER-Test-2816



Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

SECTION 3

TEST METHOD(S)

The specimens were evaluated in accordance with the following:

TAS 201-94, Impact Test Procedures

TAS 202-94, Criteria for Testing Impact & Non Impact Resistant Building Envelope Components Using Uniform Static Air Pressure

TAS 203-94, Criteria for Testing Products Subject to Cyclic Wind Pressure Loading

SECTION 4

MATERIAL SOURCE/INSTALLATION

Test specimens provided by the client. Representative samples of the test specimen(s) will be retained by Intertek B&C for a minimum of ten years from the test completion date.

Then specimen was installed into a Spruce-Pine-Fir wood test buck. The rough opening allowed for a 1/8" shim space. The interior and exterior perimeter of the door was sealed with sealant. Installation of the tested product was performed by the client.

LOCATION	ANCHOR DESCRIPTION	ANCHOR LOCATION
Through frame	#10 x 2-1/2" SS Wood Screws	Maximum on center spacing 12" with maximum 8" from corner spacing

SECTION 5

EQUIPMENT

Cannon: Constructed from steel piping utilizing compressed air to propel the missile

Missile: 2x4 Southern Pine

Timing Device: Electronic beam type

Cycling Mechanism: Computer controlled centrifugal blower with electronic pressure measuring

device

Deflection Measuring Device: Linear transducers

Version: 07/24/17 Page 3 of 20 RT-R-AMER-Test-2816



Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

SECTION 6

LIST OF OFFICIAL OBSERVERS

NAME	COMPANY
Garrett Osterode	CR Laurence Co., Inc.
Charles Presley	Intertek B&C
Jarod Hardman	Intertek B&C

SECTION 7

TEST SPECIMEN DESCRIPTION

Product Type: Side Hinged door

Series/Model: D900 (Large Missile Impact)

Product Size(s):

OVERALL AREA:	WIDTH		HEIGHT	HEIGHT	
2.6 m ² (27.8 ft ²)	millimeters	inches	millimeters	inches	
Overall Size	1067	42	2438	96	
Leaf	1030	40-9/16	2428	95-5/8	

Frame Construction:

Traine Construction.		
FRAME MEMBER	MATERIAL	DESCRIPTION
Head	Aluminum	Part No. HT450, thermally broken extrusion, see attached drawings.
Jamb	Aluminum	Part No. JI450, thermally broken extrusion, see attached drawings.
Sill	Aluminum	Part No. HT451, thermally broken extrusion, see attached drawings.
	JOINERY TYPE	DETAIL
All Corners	Flush	Secured through jambs into head and sill with two #12-24 Phillips under cut flat head machine screws.

Version: 07/24/17 Page 4 of 20 RT-R-AMER-Test-2816



Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

Door Leaf Construction:

DOOR LEAF MEMBER	R LEAF MEMBER PART # MATERIAL		DESCRIPTION
Top rail, bottom rail, and stiles	HI300 Alliminim		Thermally broken extrusion, see attached drawings.
JOINERY TYPE		DETAIL	
All Corners	All Corners Mitered		Secured at corners with corner block (Part No. CB 291) and two #12-24 Phillips under cut flat head screws per member at corners.

Reinforcement: No reinforcement was utilized.

Weatherstripping:

DESCRIPTION	QUANTITY	LOCATION
Blade gasket, Part No. WH358	1 row	Inserted into channel of exterior leg of door leaf full perimeter of door.
Bulb gasket, Part No. WH342	1 row	Inserted into channel of interior leg of frame full perimeter of door.

Glazing: No conclusions of any kind regarding the adequacy or inadequacy of the glass in any glazed test specimen(s) can be made.

GLASS TYPE	OVERALL THICKNESS	GLASS MAKEUP	GLAZING METHOD
G1	1"	3/16" clear tempered glass 3/8" air space 3/16" heat-strengthened glass 0.090" Sentryglas Plus interlayer 3/16" heat-strengthened glass	Tape glazed at interior with Part No. GT416 and full perimeter Dow 795 cap bead. Glass Stop, Part No. WN429, with Wedge Gasket, part No. WH416, at exterior.

LOCATION	QUANTITY	DAYLIGHT OPENING		GLASS BITE
		millimeters inches		
Leaf	1	838 x 2212	33 x 87-1/16	1/2"

Drainage: No drainage was utilized.



Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

Hardware:

DESCRIPTION	QUANTITY	LOCATION
Athinai M156/216N – Solid Brass w/ Deadbolt	1	Secured to door leaf 42" from sill.
Deadbolt Strike	1	Part No. TH701, secured to jamb directly opposite handle assembly.
Tongue Strike	1	Part No. TH702, secured to jamb directly opposite handle assembly.
Shoot Bolt Strike	2	Part No. TH703, secured to head and sill, directly opposite shoot bolt at locking jamb.
Hinge Assembly	4	Located 8" from head and sill and equidistant spacing along hinge stile, each hinge was secured to the frame and stile with four #12-24 Phillips under cut flat head machine screws per side.

Screen Construction: No screen was utilized.

Version: 07/24/17 Page 6 of 20 RT-R-AMER-Test-2816



Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

SECTION 8

TEST RESULTS

Protocol TAS 202-94, Static Air Pressure

Test Date(s): 01/24/18 through 01/26/18

The temperature during testing was 17°C (63°F). The results are tabulated as follows:

Test Specimen #1

TITLE OF TEST	RESULTS	ALLOWED	NOTE
Air Leakage,			
Infiltration per TAS 202	0.1 L/s/m ²	1.5 L/s/m ²	
at 1.57 psf (25 mph)	(0.02 cfm/ft ²)	(0.30 cfm/ft ²) max.	1
Air Leakage,			
Infiltration per TAS 202	0.3 L/s/m ²	1.5 L/s/m ²	
at 6.24 psf (50 mph)	(0.06 cfm/ft ²)	(0.30 cfm/ft ²) max.	1
Water Penetration,			
per TAS 202			
15% of Positive Design Pressure			
at 720 Pa (15.04 psf)	Pass	No leakage	
Forced Entry Resistance,			
per AAMA 1304	Pass	No entry	

Note 1: Test Date 01/24/18, Time: 9:00 AM

Test Specimen #1: Preload and Design Load per TAS 202

LOAD	INDICATOR	DEFLECTION (in.)		PERMANENT SET (in.)	
(psf)	LOCATION	MEASURED	ALLOWED	MEASURED	ALLOWED
+40.0	1	0.03	N/A	0.01	N/A
50% of Test Pressure	2	0.07	N/A	0.00	N/A
	3	0.06	N/A	0.01	N/A
+80.0	1	0.08	N/A	0.02	N/A
Design Pressure	2	0.15	N/A	0.01	N/A
	3	0.12	N/A	0.01	N/A
-40.0	1	0.02	N/A	0.00	N/A
50% of Test Pressure	2	0.11	N/A	0.01	N/A
	3	0.06	N/A	0.01	N/A
-80.0	1	0.06	N/A	0.01	N/A
Design Pressure	2	0.21	N/A	0.02	N/A
	3	0.15	N/A	0.02	N/A

Version: 07/24/17 Page 7 of 20 RT-R-AMER-Test-2816



Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

Test Specimen #1: Structural Overload Load per TAS 202

rest specimen wir. Structural Sverioda Edda per 17.5 202					
LOAD	INDICATOR	DEFLECTION (in.)		PERMANENT SET (in.)	
(psf)	LOCATION	MEASURED	ALLOWED	MEASURED	ALLOWED
+120.0	1	0.11	N/A	0.02	N/A
Test Pressure	2	0.25	N/A	0.03	N/A
	3	0.16	N/A	0.03	N/A
-120.0	1	0.12	N/A	0.03	N/A
Test Pressure	2	0.45	N/A	0.04	N/A
	3	0.27	N/A	0.03	N/A

Note 2: Positive and negative uniform static load test loads were held for 30 seconds.

Note 3: Tape and film were to seal against air leakage during structural testing. In our opinion, the tape and film did not influence the results of the test.

Note 4: See Sketch #1 for indicator locations. Deflection/permanent set reported is the overall deflection between three points (longest unsupported span) which accounts for support movement.

Version: 07/24/17 Page 8 of 20 RT-R-AMER-Test-2816



Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

Protocol TAS 201-94, Large Missile Impact Procedures

Test Date(s): 01/25/18 through 01/26/18

The temperature during testing was 18°C (65°F). The results are tabulated as follows:

Test Specimen #1

IMPACT#	MISSILE WEIGHT (lbs.)	MISSILE LENGTH (in.)	MISSILE VELOCITY (ft./sec.)
1	9.5	96	50.0
2	9.5	96	49.8
3	9.5	96	49.5

Test Specimen #2

IMPACT #	MISSILE WEIGHT (lbs.)	MISSILE LENGTH (in.)	MISSILE VELOCITY (ft./sec.)
1	9.5	96	49.5
2	9.5	96	50.0

Test Specimen #3

IMPACT #	MISSILE WEIGHT (lbs.)	MISSILE LENGTH (in.)	MISSILE VELOCITY (ft./sec.)
1	9.5	96	50.0
2	9.5	96	49.6

Note 5: See Sketch #2-4 for impact locations.

Version: 07/24/17 Page 9 of 20 RT-R-AMER-Test-2816



Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

Protocol TAS 203-94, Cyclic Wind Pressure Loading

Test Date(s): 01/25/18 through 01/26/18

The temperature during testing was 22°C (72°F). The results are tabulated as follows:

Test Specimen #1: Cyclic Test Spectrum and Average Cycle Time per TAS 203

DESIGN PRESSURE	STAGE			
+80.0 / 80.0 psf	1	2	3	4
POSITIVE PRESSURE RANGE (psf)	16.0 – 40.0	0 – 48.0	40.0 – 64.0	24.0 - 80.0
AVERAGE CYCLE TIME (sec.)	2.04	2.83	2.70	3.08
NUMBER OF CYCLES	3500	300	600	100
	5	6	7	8
NEGATIVE PRESSURE RANGE (psf)	24.0 – 80.0	40.0 – 64.0	0 – 48.0	16.0 – 40.0
AVERAGE CYCLE TIME (sec.)	3.72	3.02	2.93	3.03
NUMBER OF CYCLES	50	1050	50	3350

Test Specimen #2: Cyclic Test Spectrum and Average Cycle Time per TAS 203

DESIGN PRESSURE	STAGE			
+80.0 / 80.0 psf	1	2	3	4
POSITIVE PRESSURE RANGE (psf)	16.0 – 40.0	0 – 48.0	40.0 – 64.0	24.0 - 80.0
AVERAGE CYCLE TIME (sec.)	2.02	2.91	2.05	3.09
NUMBER OF CYCLES	3500	300	600	100
	5	6	7	8
NEGATIVE PRESSURE RANGE (psf)	24.0 - 80.0	40.0 – 64.0	0 – 48.0	16.0 – 40.0
AVERAGE CYCLE TIME (sec.)	3.45	2.78	2.96	2.68
NUMBER OF CYCLES	50	1050	50	3350

Test Specimen #3: Cyclic Test Spectrum and Average Cycle Time per TAS 203

DESIGN PRESSURE	STAGE			
+80.0 / 80.0 psf	1	2	3	4
POSITIVE PRESSURE RANGE (psf)	16.0 – 40.0	0 – 48.0	40.0 – 64.0	24.0 - 80.0
AVERAGE CYCLE TIME (sec.)	2.04	2.71	2.32	2.62
NUMBER OF CYCLES	3500	300	600	100
	5	6	7	8
NEGATIVE PRESSURE RANGE (psf)	24.0 – 80.0	40.0 – 64.0	0 – 48.0	16.0 – 40.0
AVERAGE CYCLE TIME (sec.)	3.29	2.79	3.64	2.55
NUMBER OF CYCLES	50	1050	50	3350



Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

SECTION 9

CONCLUSIONS

The large missiles impacted each intended target. Each impact location was carefully inspected. No signs of penetration, rupture, or opening after the large missile impact test were observed; as such, each test specimen satisfies the large missile requirements of TAS 201. Upon completion of testing, specimens tested for TAS 201-94 met the requirements of Section 1626 of the Florida Building Code, Building.

AND

No signs of failure were observed in any area of the test specimen during the TAS 202 testing; as such, the test specimen satisfies the requirements of TAS 202. Upon completion of testing, specimens tested for TAS 202-94 met the requirements of Section 1620 of the Florida Building Code, Building.

AND

No signs of failure were observed in any area of the test specimens during the cyclic load test; as such, the test specimens satisfy the cyclic load requirements of TAS 203. Upon completion of testing, specimens tested for TAS 203-94 met the requirements of Section 1626 of the Florida Building Code, Building.

Version: 07/24/17 Page 11 of 20 RT-R-AMER-Test-2816



Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building


TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

SECTION 10

SKETCH(ES)

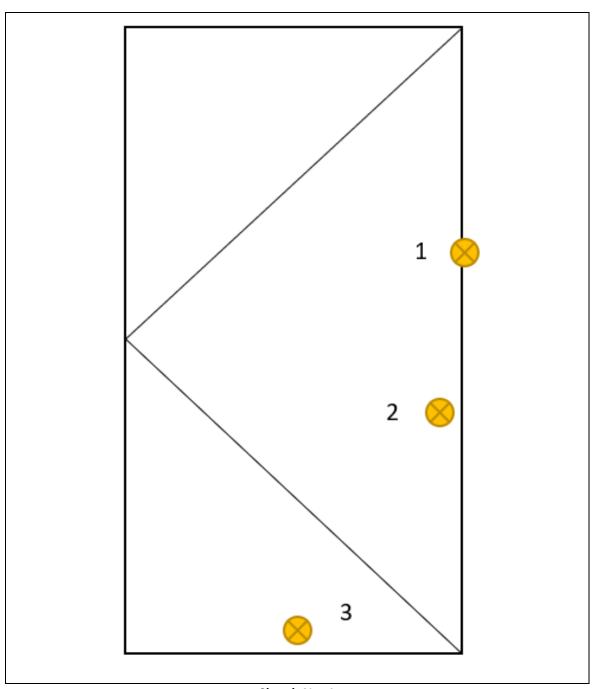

Sketch No. 1
TAS 202 Indicator Locations




Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

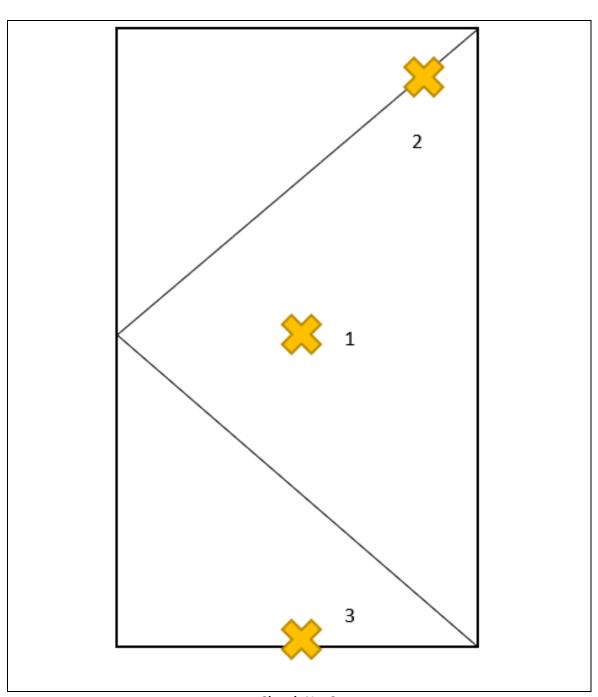

Sketch No. 2
TAS 201 Impact Locations Specimen #1




Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

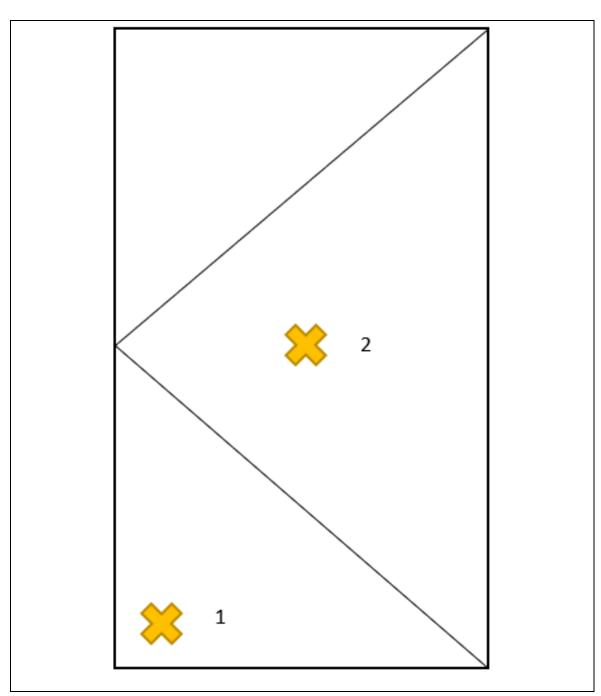

Sketch No. 3
TAS 203 Indicator Locations Specimen #2




Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

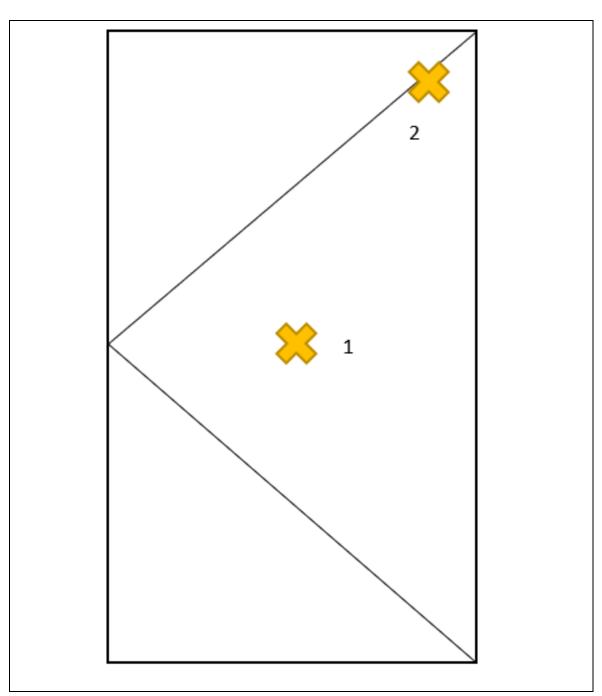

Sketch No. 4
TAS 203 Indicator Locations Specimen #3



Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2


Date: 02/06/19


SECTION 11


DRAWINGS

The test specimen drawings have been reviewed by Intertek B&C and are representative of the test specimen(s) reported herein. Test specimen construction was verified by Intertek B&C per the drawings included in this report. Any deviations are documented herein or on the drawings.

Version: 07/24/17 Page 16 of 20 RT-R-AMER-Test-2816

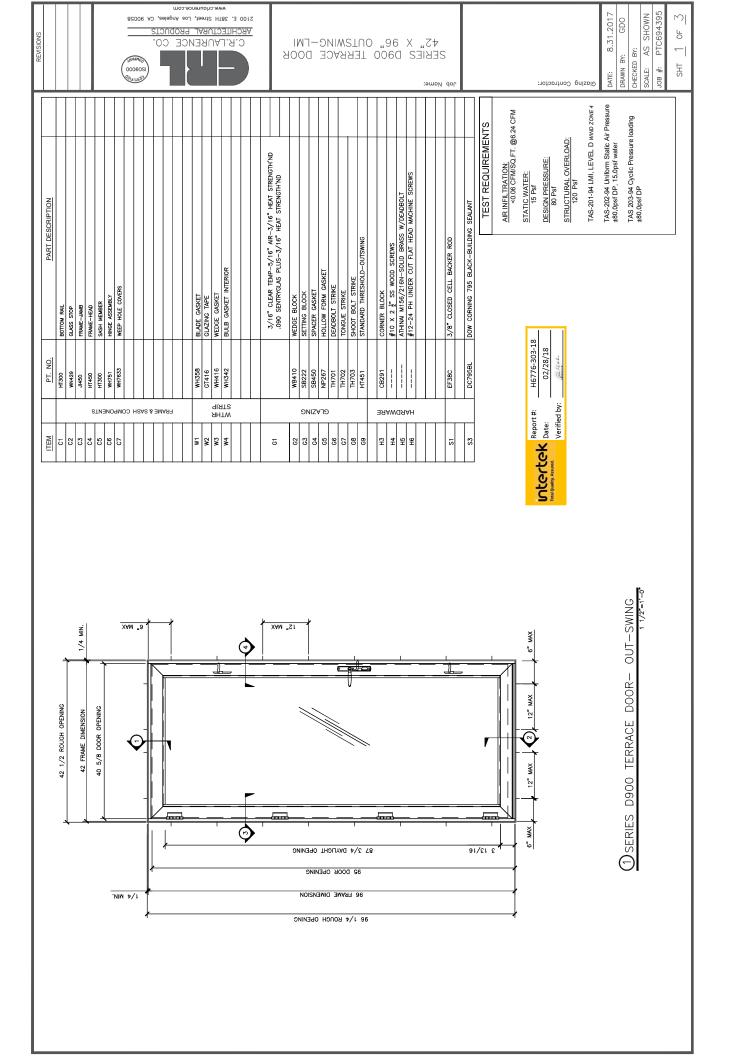

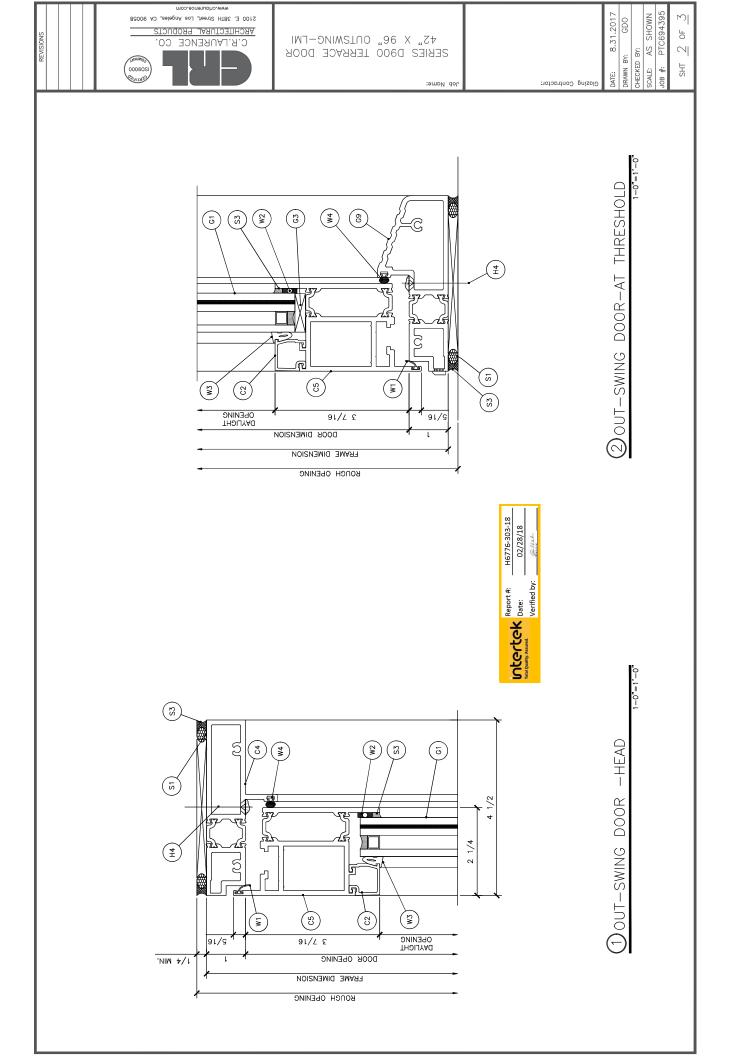

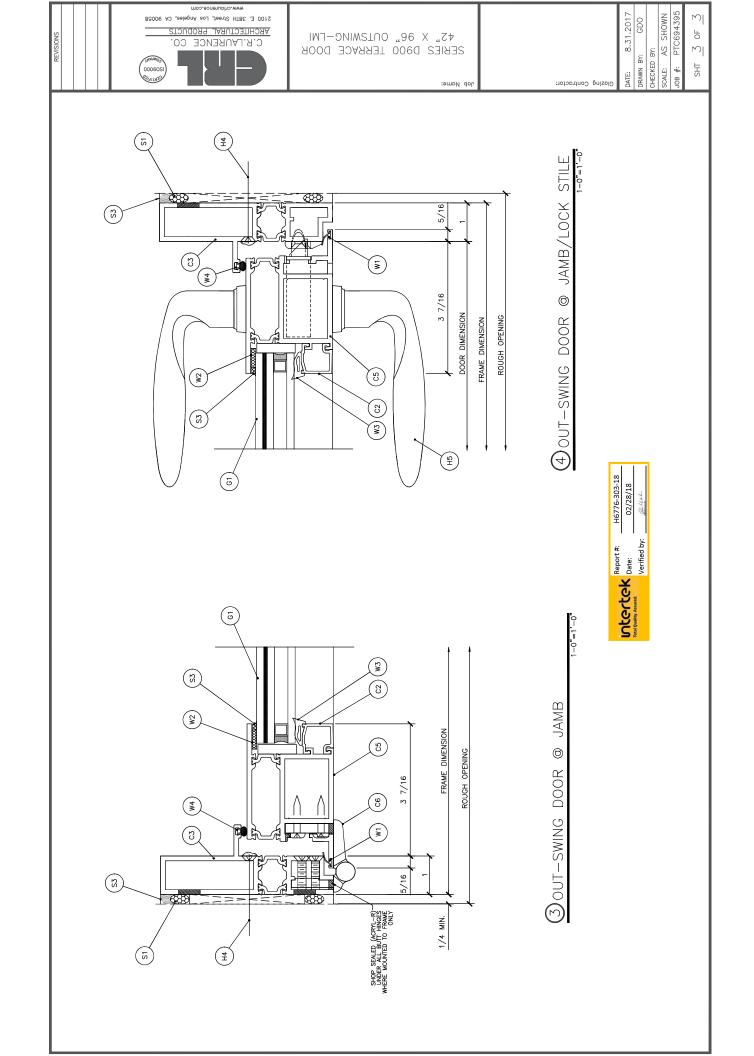



Telephone: 949-460-9600 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CR LAURENCE CO., INC.

Report No.: H6776.01-303-18 R2

Date: 02/06/19

SECTION 12

REVISION LOG

REVISION #	DATE	PAGES	REVISION
0	02/16/18	N/A	Original Report Issue
			Correct overall frame dimension
1	03/01/18	4	measurement.
1	03/01/18	5	Update glazing gasket part number.
			Update drawing packet to reflect correct
1	03/01/18	17-19	gasket part number.
2	02/06/19	Header	Correct header job number